





Zphono XRM
LVP €
799,00





- Signal to Noise Ratio, MM 40 dB Setting > 94 dB, input shorted, IHF A-weighted > 90 dB, input shorted, unweighted
- Signal to Noise Ratio, MM 50 dB Setting > 94 dB, input shorted, IHF A-weighted > 90 dB, input shorted, unweighted
- Signal to Noise Ratio, MC 50 dB Setting > 92 dB, input shorted, IHF A-weighted > 88 dB, input shorted, unweighted
- Rumble Filter 40 Hz high pass, 18 dB /octave
- RIAA accurate to within 0.2 dB
- MC 50-1050 ohms variable impedance adjustment
- Dual inputs for two turntables (1 MM & 1 MC)
- Front panel Mono/Stereo Mode switch
- Balanced XLR and unbalanced RCA outputs
- Ultra high-speed, low-noise op amps
- Ultra-low distortion <0.02% THD
- MC Gain options of 50 dB or 60 dB unbalanced (56 dB / 66 dB balanced)
- Front panel turntable Input Select switch
- Front panel Rumble Filter switch
- Audiophile-grade resistors and capacitors

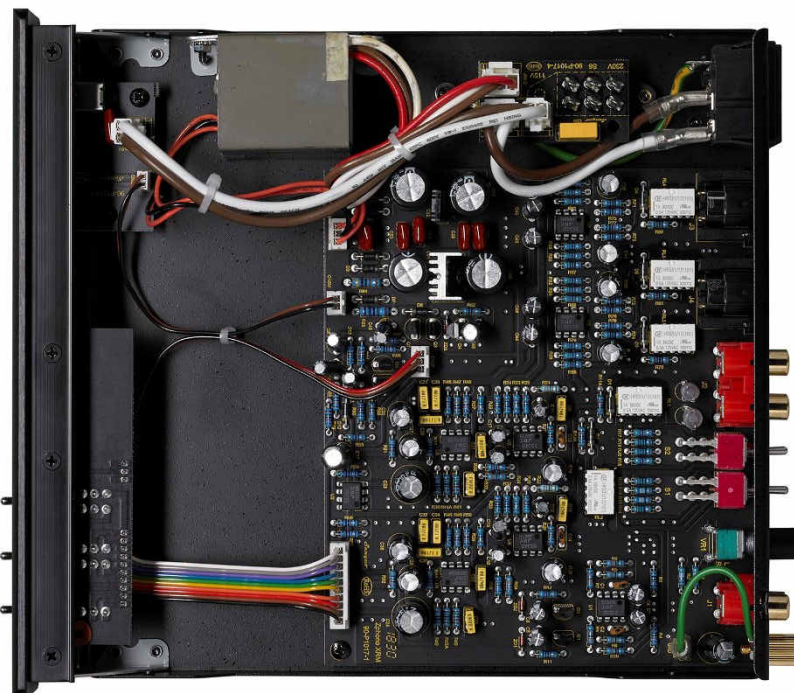

Specifications

Frequency Response

20-20kHz, +/- 0.2dB

Total Harmonic Distortion

0.02% at 1 kHz

Signal to Noise Ratio, MM 40dB Setting

> 94 dB, input shorted, IHF A-weighted
> 90 dB, input shorted, unweighted

Signal to Noise Ratio, MM 50dB Setting

> 94 dB, input shorted, IHF A-weighted
> 90 dB, input shorted, unweighted

Signal to Noise Ratio, MC 50dB Setting

> 92 dB, input shorted, IHF A-weighted
> 88 dB, input shorted, unweighted

Signal to Noise Ratio, MC 60dB Setting

> 82 dB, input shorted, IHF A-weighted
> 80 dB, input shorted, unweighted

Inter-channel Crosstalk

> 80 dB at 1 kHz

Input Impedance

MM: 47k Ω
MC: 50-1050 Ω

Output Impedance

Unbalanced: 150 Ω
Balanced: 150 Ω per leg

Input Sensitivity at 1 kHz, 4mV Input

40dB: 5 mV for 500mV output
50dB: 5 mV for 1.5 Volts output
60dB: 5 mV for 3 Volts output

Input Sensitivity at 1 kHz, 1V Output

40dB: 10mV for 1.0 Volt output
50dB: 3.5mV for 1.0 Volt output
60dB: 1.8mV for 1.0 Volt output

Total Gain

40dB / 50dB / 60dB (unbalanced output)
46dB / 56dB / 66dB (balanced output)

Rumble Filter

40Hz high pass, 18dB /oct.

AC Power Requirement

Standby: 0 watts
Power On: 7 watts
115 VAC or 230VAC 50 - 60 Hz
(Selected on bottom)

Dimensions

Width: 8.5" (220mm)
Depth: 10" (254mm)
Depth: 12" (305mm) - cables connected
Height, with feet: 2" (51mm)
Height, without feet: 1.75" (45mm), 1U

Weight

Net: 3.9lbs. (1.8kg)
Shipping: 6.8lbs. (3.1kg)

*Specifications and features subject to change or improvement without notice.
Copyright Parasound Products, Inc., 2018, Rev 1.0*