

FURUTECH

PURE TRANSMISSION



High End Performance Duplex SCHUKO Wall Socket



FT-SWS-D NCF(R)

Rhodium Plated Non-magnetic Conductor and Carbon Fiber Finished Aluminum Face Plate

Type: 2-pole+earth


Rating: 16A 250V A.C.

Nano Crystal² Formula (NCF).

Incorporated into selected Furutech products, NCF features a special crystalline material that has two 'active' properties. First, it generates negative ions that eliminate static. Second, it converts thermal energy into far infrared. Furutech combines this remarkable material with nano-sized ceramic particles and carbon powder for their additional 'piezoelectric effect' damping properties. The resulting Nano Crystal² Formula is the ultimate electrical and mechanical damping material. Created by Furutech, it is found exclusively in Furutech products.

Features

- α (Alpha) Pure copper main conductor (t : 0.5mm)
- Insulation Materials: Nylon/fiberglass with special "NCF" anti-resonance damping material - nano-sized crystalline, piezo ceramic particles and carbon powder
- Bracket with a 1.0mm thick Zinc/steel brace plate
- Beautifully-crafted Carbon fiber finished Aluminum face plate (color coated).
- Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw)
- Dimensions: 152.0mm (L) x 81.0mm (W) x 48.0mm(H)
- Furutech's total attention to detail and build quality extends right down to a specially designed patent-pending pressure plate (see below) that increases the contact area of the Alpha Conductors.

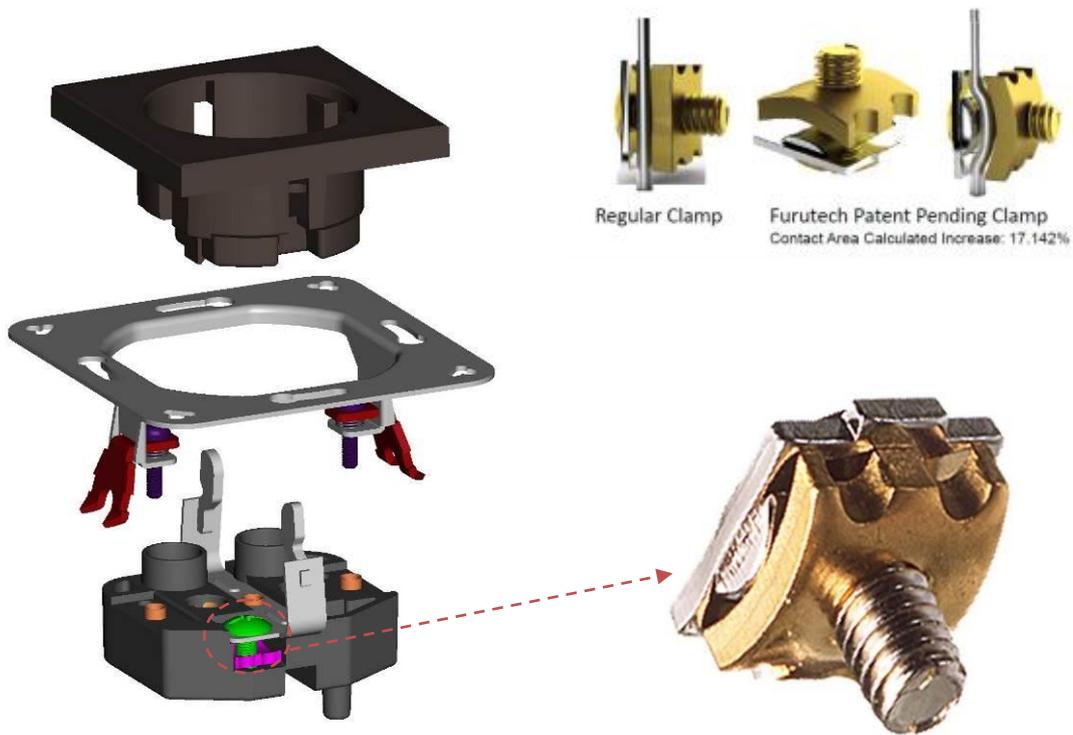

All metallic parts are treated with the

**FURUTECH α (Alpha) Process (Super Cryogenic & Demagnetizing Treatment.)*

FURUTECH CO., LTD
service@furutech.com

Make A More Powerful Connection with Furutech!

Product name	Product Introduction	JAN CODE
FT-SWS-D NCF(R)	High Performance Duplex SCHUKO Wall Sockets 16A250V	4580370443448